TIMESAVERS ORIGINALS OVERVIEW RETURN TABLE

A return table makes it possible to have one machine operator, because the parts will be brought back to the front of the machine.



Motorised execution

180° right curve directly out of machine + straight table length back to the frontside of machine.

Standalone installation

Speed of conveyor can be separately adjusted on cabinet at end of table.
Emergency on/off buttons on table are connected to machines' buttons.


Benefits

- Process more products in the same time.
- Increases operators' efficiency, because he can stay at one place and continue feeding parts.
- Durable construction. Aluminium enforced carriage.
- Strong conveyor belt. Low maintenance and long lifetime.



Restrictions:

- Max load per m²; (up to 100 kg).
- Standard machine opening 0-20 mm. Machine with constant pass 0 100 mm.
- Straight table with bend; 180° to front of machine (inc. front table).
- Belt speed: 0.5-8 m p/min (incl. drive motor).
- Belt height: 840-940 mm (constant pass to 1040 mm).

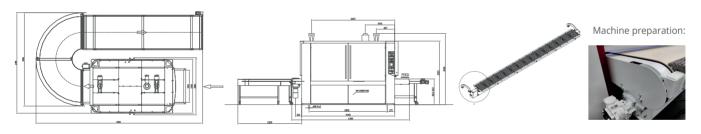

SERIES	SIZES	ITEM NUMBER 180° CURVE + TABLE	ITEM NUMBER MACHINE PREPARATION	DELIVERY TIME
22 600 WRB*	2500 x 600 x 850 mm	00138822	461926	12 weeks
22 600 WRBW**	3000 x 600 x 850 mm	00138823	461927	12 weeks
32 1100 RB*	2500 x 1100 x 850 mm	00138824	461928	12 weeks
32 1100 WRB/RBW/WRBW/RBW/ HWRB**	3000 x 1100 x 850 mm	00138825	461929	12 weeks
42 1350 RB*	4000 x 1350 x 850 mm	00138826	461930	12 weeks
42 1350 WRB/WRBW/ WWRBW/ RBW/HWRB**	4500 x 1350 x 850 mm	00138831	461931	12 weeks
42 1600 RB*	4000 x 1550 x 850 mm	00138834	461937	12 weeks
42 1600 WRB/WRBW**	4500 x 1550 x 850 mm	00138835	461938	12 weeks

tother executions required if machine equipped with; constant pass, conveyor cleaning brush, mirrored execution

 $\textbf{Requests \& orders:} \ parts @ times aver sint.com \mid www.times aver sint.com \\ Please mention your machine serial number with your request or order. \\$

 $[\]ensuremath{^{**}}$ machine preparation executed for conveyor cleaning brush execution